


PRODUCT SPECIFICATION

		Grade Availability by GSM										Units	Tolerance
Substance (GSM)		230	250	285	296/300	330	350	370	400	420	450		± 5%
Caliper		269	293	336	354	389	413	444	480	504	540	microns	± 5%
Bulk		1.17	1.17	1.18	1.18	1.18	1.18	1.20	1.20	1.20	1.20	cc/gm	± 5%
Moisture (gsm)	<250	6.0-6.5										%	-
	250-300	6.5-7.0											
	300-400	7.0-8.0											
	>400	8.0-8.5											
Taber Stiffness	MD	45	60	80	95	115	130	160	190	198	210	gm.cm	± 10%
	CD	16	20	32	38	46	52	64	76	86	100		
	GM	26.83	36.64	50.50	60.00	72.70	82.20	101.10	120.10	130.49	145.00		
PPS Roughness (±0.5)		2.6										microns	-
Gloss at 75°		40										%	± 5%
Burst Factor		13										Min	± 5%
IGT Dry- Pick		> 0.6										m/sec	± 5%
Cobb - 60	Top	30-50										g/m²	-
	Bottom	40-80											
Plybond		>55										J/m² Min	-
SOA		500										Sec.Min	-
Brightness		72										%	± 1%
K & N Ink Value		05 - 08										%	± 5%
Surface PH		6.0 ± 0.5											-

BOARD STRUCTURE

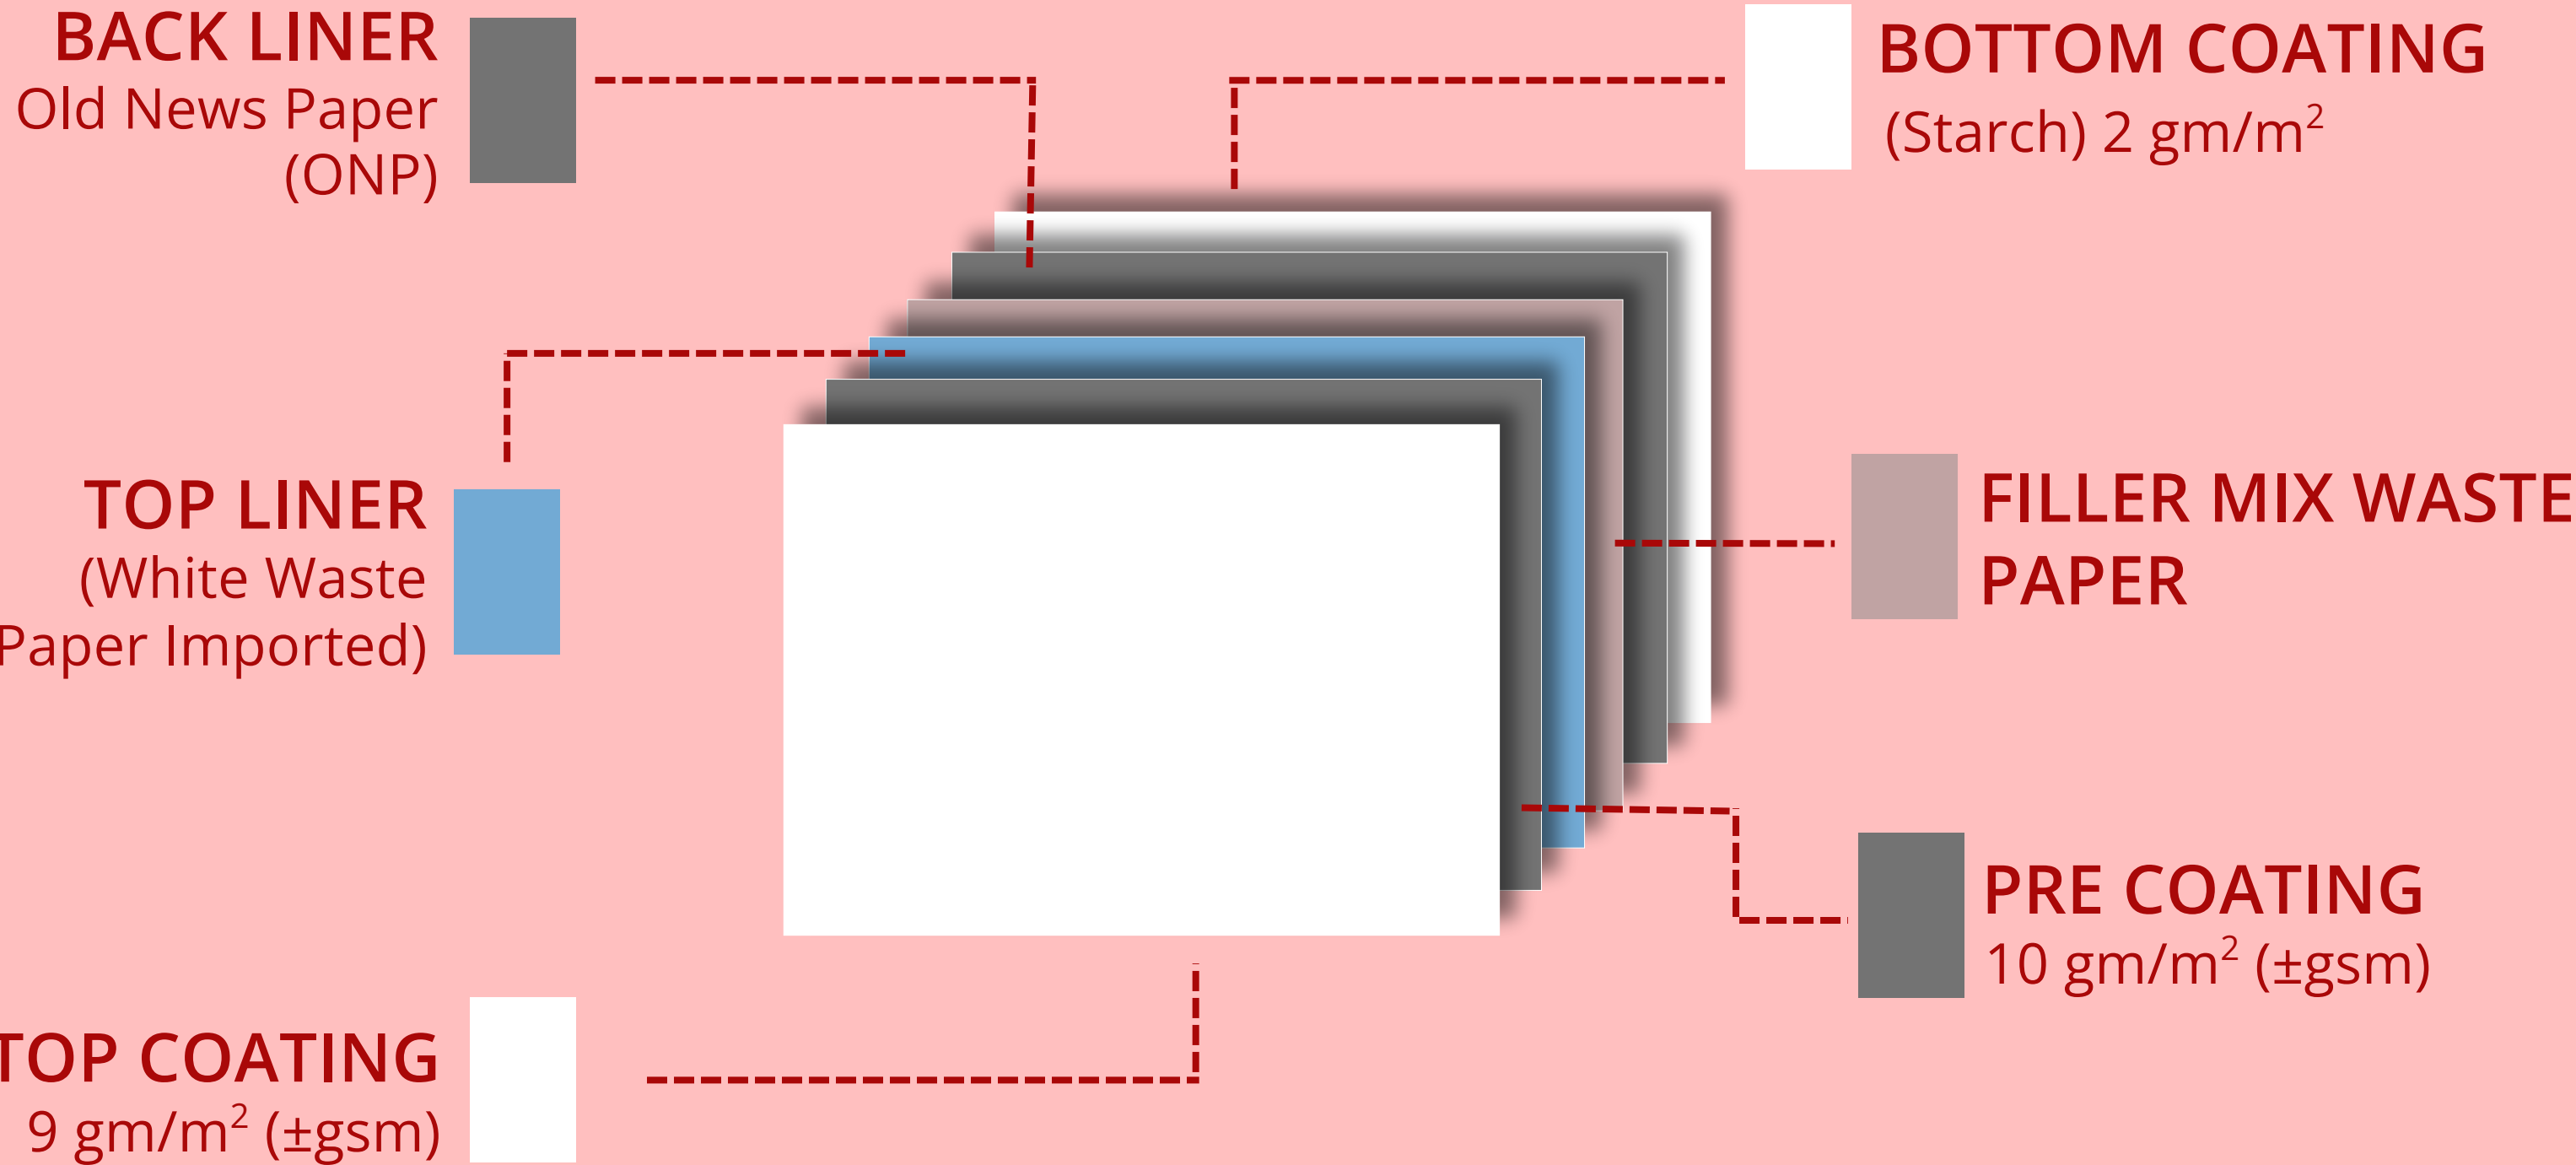

DECKLE

DUPLEX MACHINE:
Min: 315 cm
Max: 326 cm

APPLICATIONS

- 1. Recommend for Multicolour printing on
 - a. OFFSET Printing
 - b. Letter Press
 - c. Roto GRAVURE
- 2. Carton with back side printings
- 3. Adverties pamphlets
- 4. Pharmaceutical cartons
- 5. High Printing job

For more information, please contact your Dev Priya Products Pvt. Ltd representative or visit our website at www.devproduct.com
This information is subject to modification without notification.