


PRODUCT SPECIFICATION

		Grade Availability by GSM									Units	Tolerance
Substance (GSM)		285	296/300	320	330	350	370	400	420	450		± 5%
Caliper		356	375	400	412	437	462	508	533	571	microns	± 5%
Bulk		1.25	1.25	1.25	1.25	1.25	1.25	1.27	1.27	1.27	cc/gm	± 5%
Moisture (gsm)	<250	6.0-6.5									%	-
	250-300	6.5-7.0										
	300-400	7.5-7.8										
	>400	7.8-8.0										
Taber Stiffness	MD	92	108	128	140	156	180	218	228	245	gm.cm	± 10%
	CD	38	48	55	58	68	78	95	103	115		
	GM	59.12	72.00	83.90	90.11	102.99	118.49	143.90	153.24	167.85		
PPS Roughness (±0.5)		2.5									microns	-
Gloss at 75°		50									%	± 5%
Burst Factor		15									Min	± 1%
IGT Dry- Pick		> 0.7									m/sec	± 5%
Cobb - 60	Top	30-50									g/m²	-
	Bottom	40-80										
Plybond		>70									J/m² Min	-
SOA		500									Sec.Min	-
Brightness		79									%	± 1%
K & N Ink Value		10 - 12									%	± 5%
Surface PH		6.0 ± 0.5										-

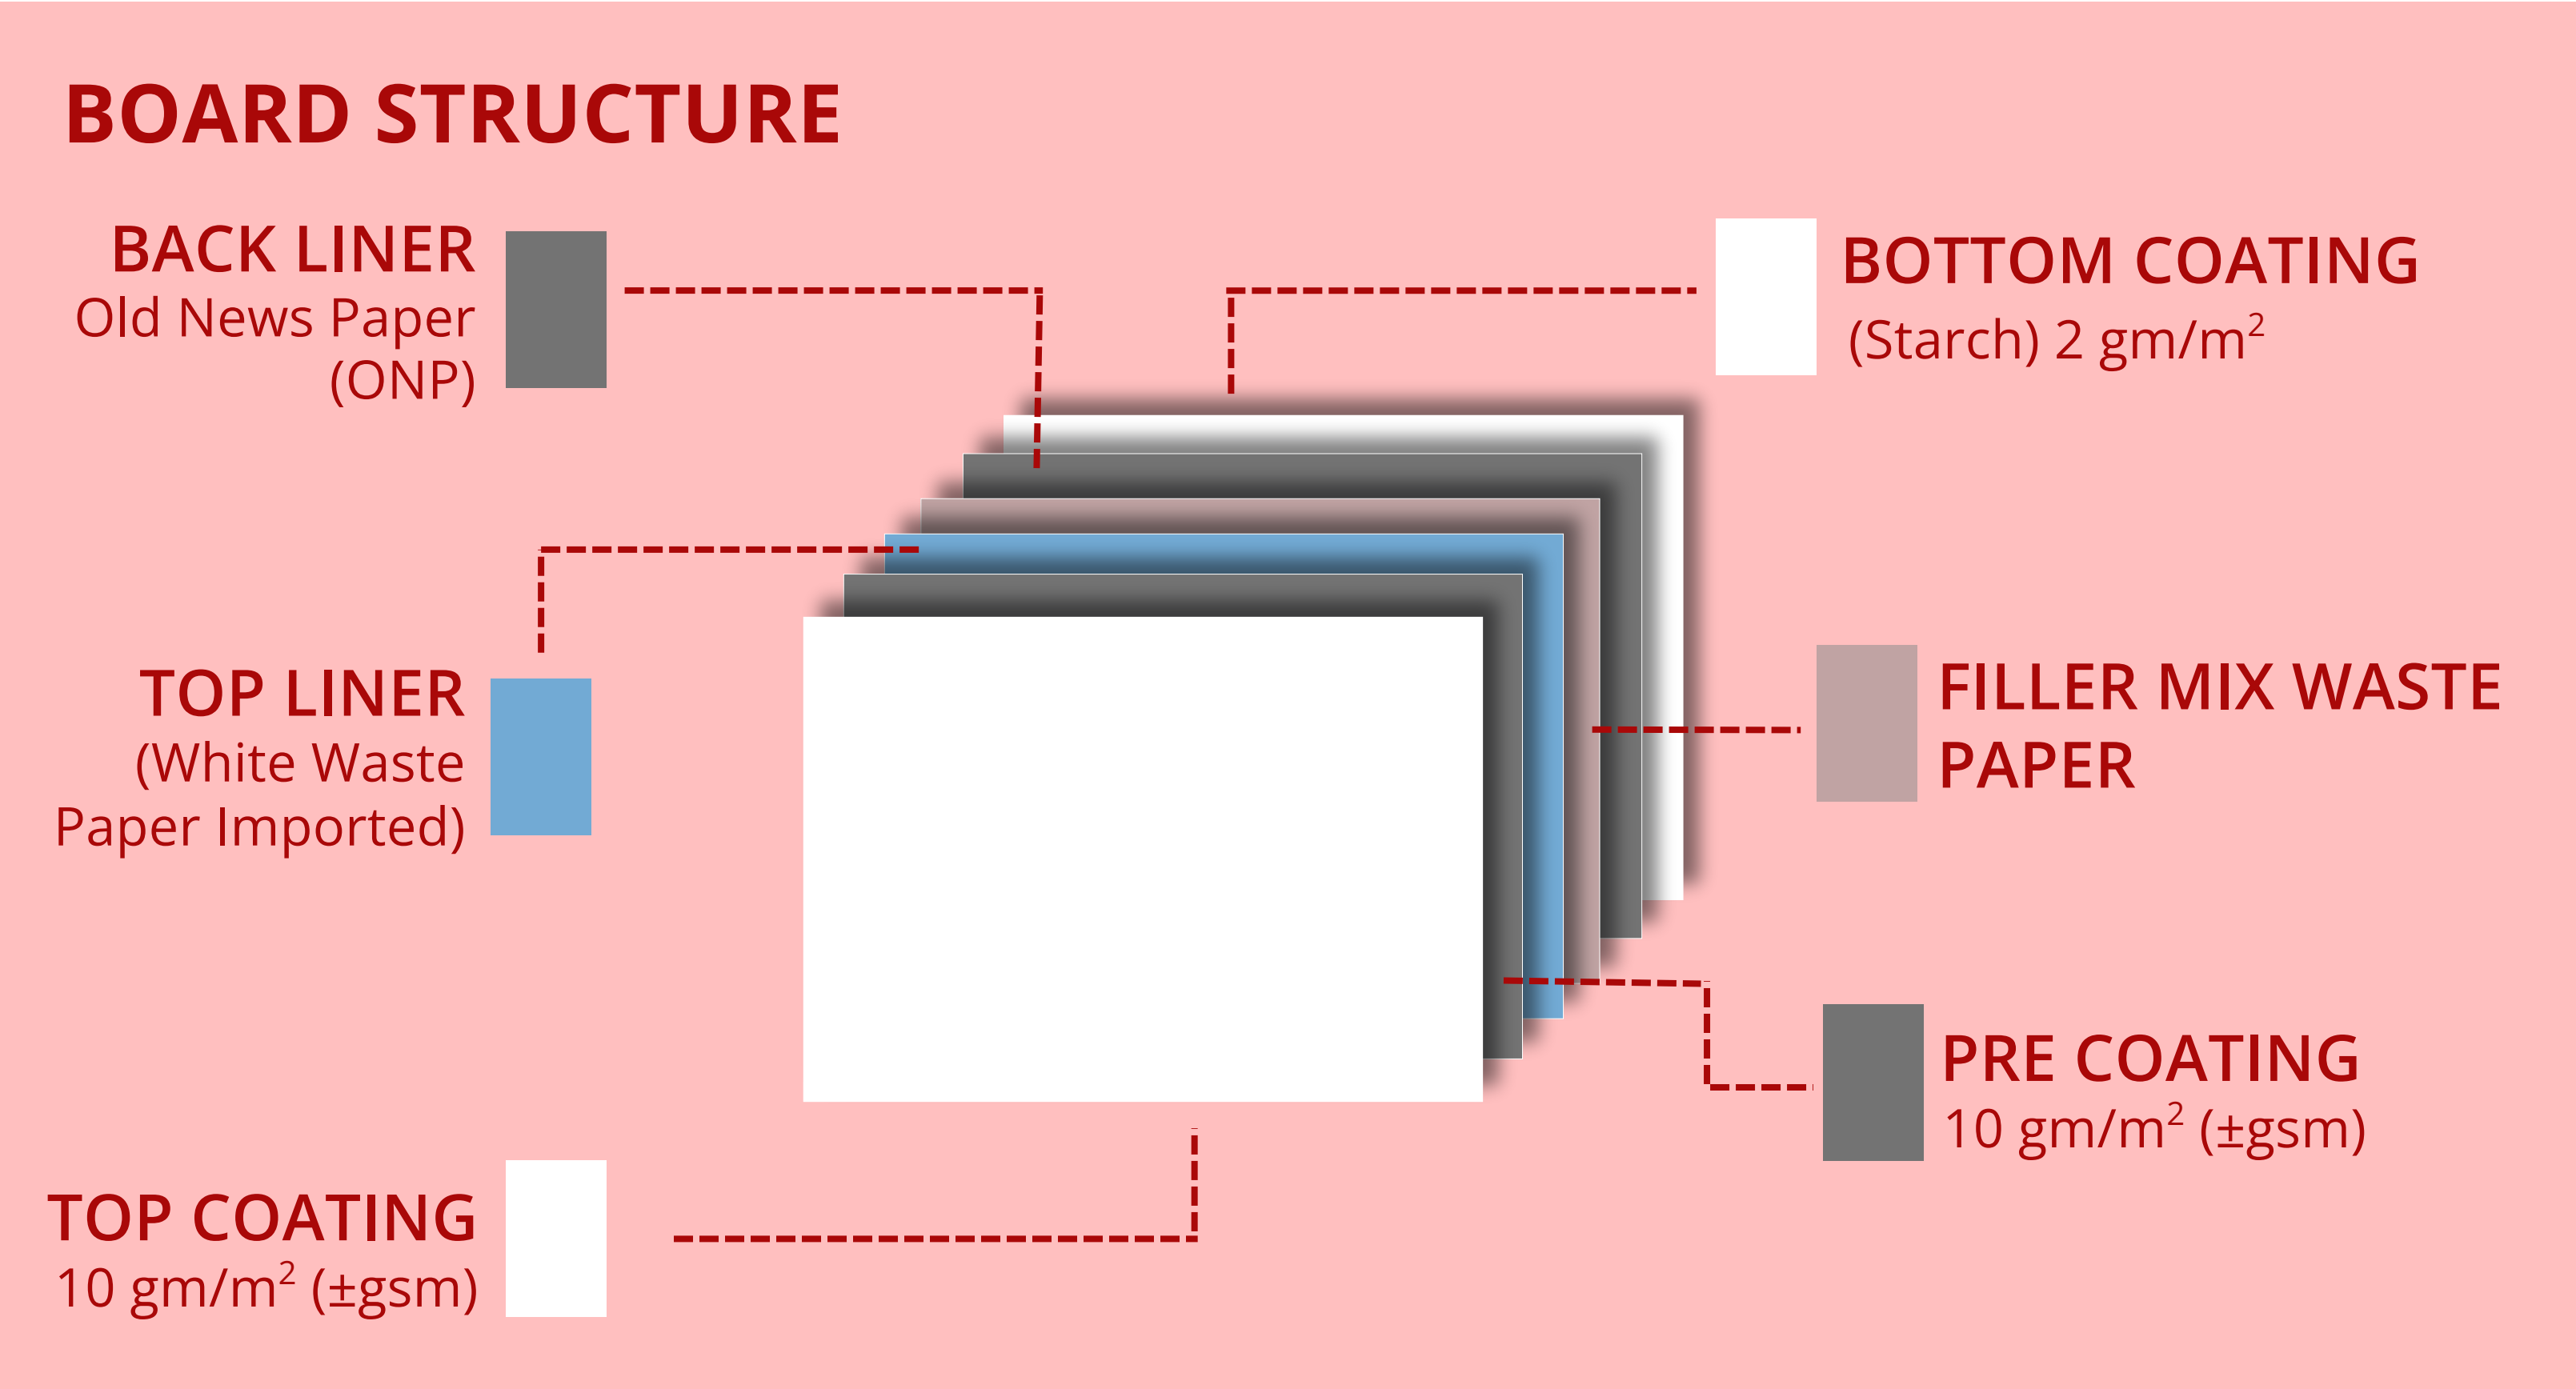

DECKLE

DUPLEX MACHINE:
Min: 315 cm
Max: 326 cm

APPLICATIONS

1. Recommend for Multicolour printing on
- a. OFFSET Printing
b. Letter Press
c. Roto GRAVURE
2. Carton with back side printings
3. Adverties pamphlets
4. Pharmaceutical cartons
5. High Printing job

For more information, please contact your Dev Priya Products Pvt. Ltd representative or visit our website at www.devproduct.com
This information is subject to modification without notification.