


PRODUCT SPECIFICATION

		Grade Availability by GSM									Units	Tolerance
Substance (GSM)		250	285	296/300	330	350	370	400	420	450		± 5%
Caliper		275	319	342	379	402	425	464	491	531	microns	± 5%
Bulk		1.10	1.12	114	1.15	1.15	1.15	1.16	1.17	1.18	cc/gm	± 5%
Moisture (gsm)	285-300	6.5-7.0									%	-
	300-400	7.5-7.8										
	>400	7.8-8.0										
Taber Stiffness	MD	60	80	90	115	130	160	190	204	225	gm.cm	± 10%
	CD	23	35	40	45	50	65	80	92	110		
	GM	37.14	53.00	60.00	72.00	80.60	102.00	123.20	136.90	157.32		
PPS Roughness (±0.5)		2.5									microns	-
Burst Factor		15									Min	± 1%
IGT Dry- Pick		> 0.7									m/sec	± 5%
Cobb - 60	Top	30-50									g/m²	-
	Bottom	40-80										
Plybond		>70									J/m² Min	-
SOA		500									Sec.Min	-
Brightness		78									%	± 1%
K & N Ink Value		10 - 12									%	± 5%
Surface PH		6.0 ± 0.5										-

BOARD STRUCTURE

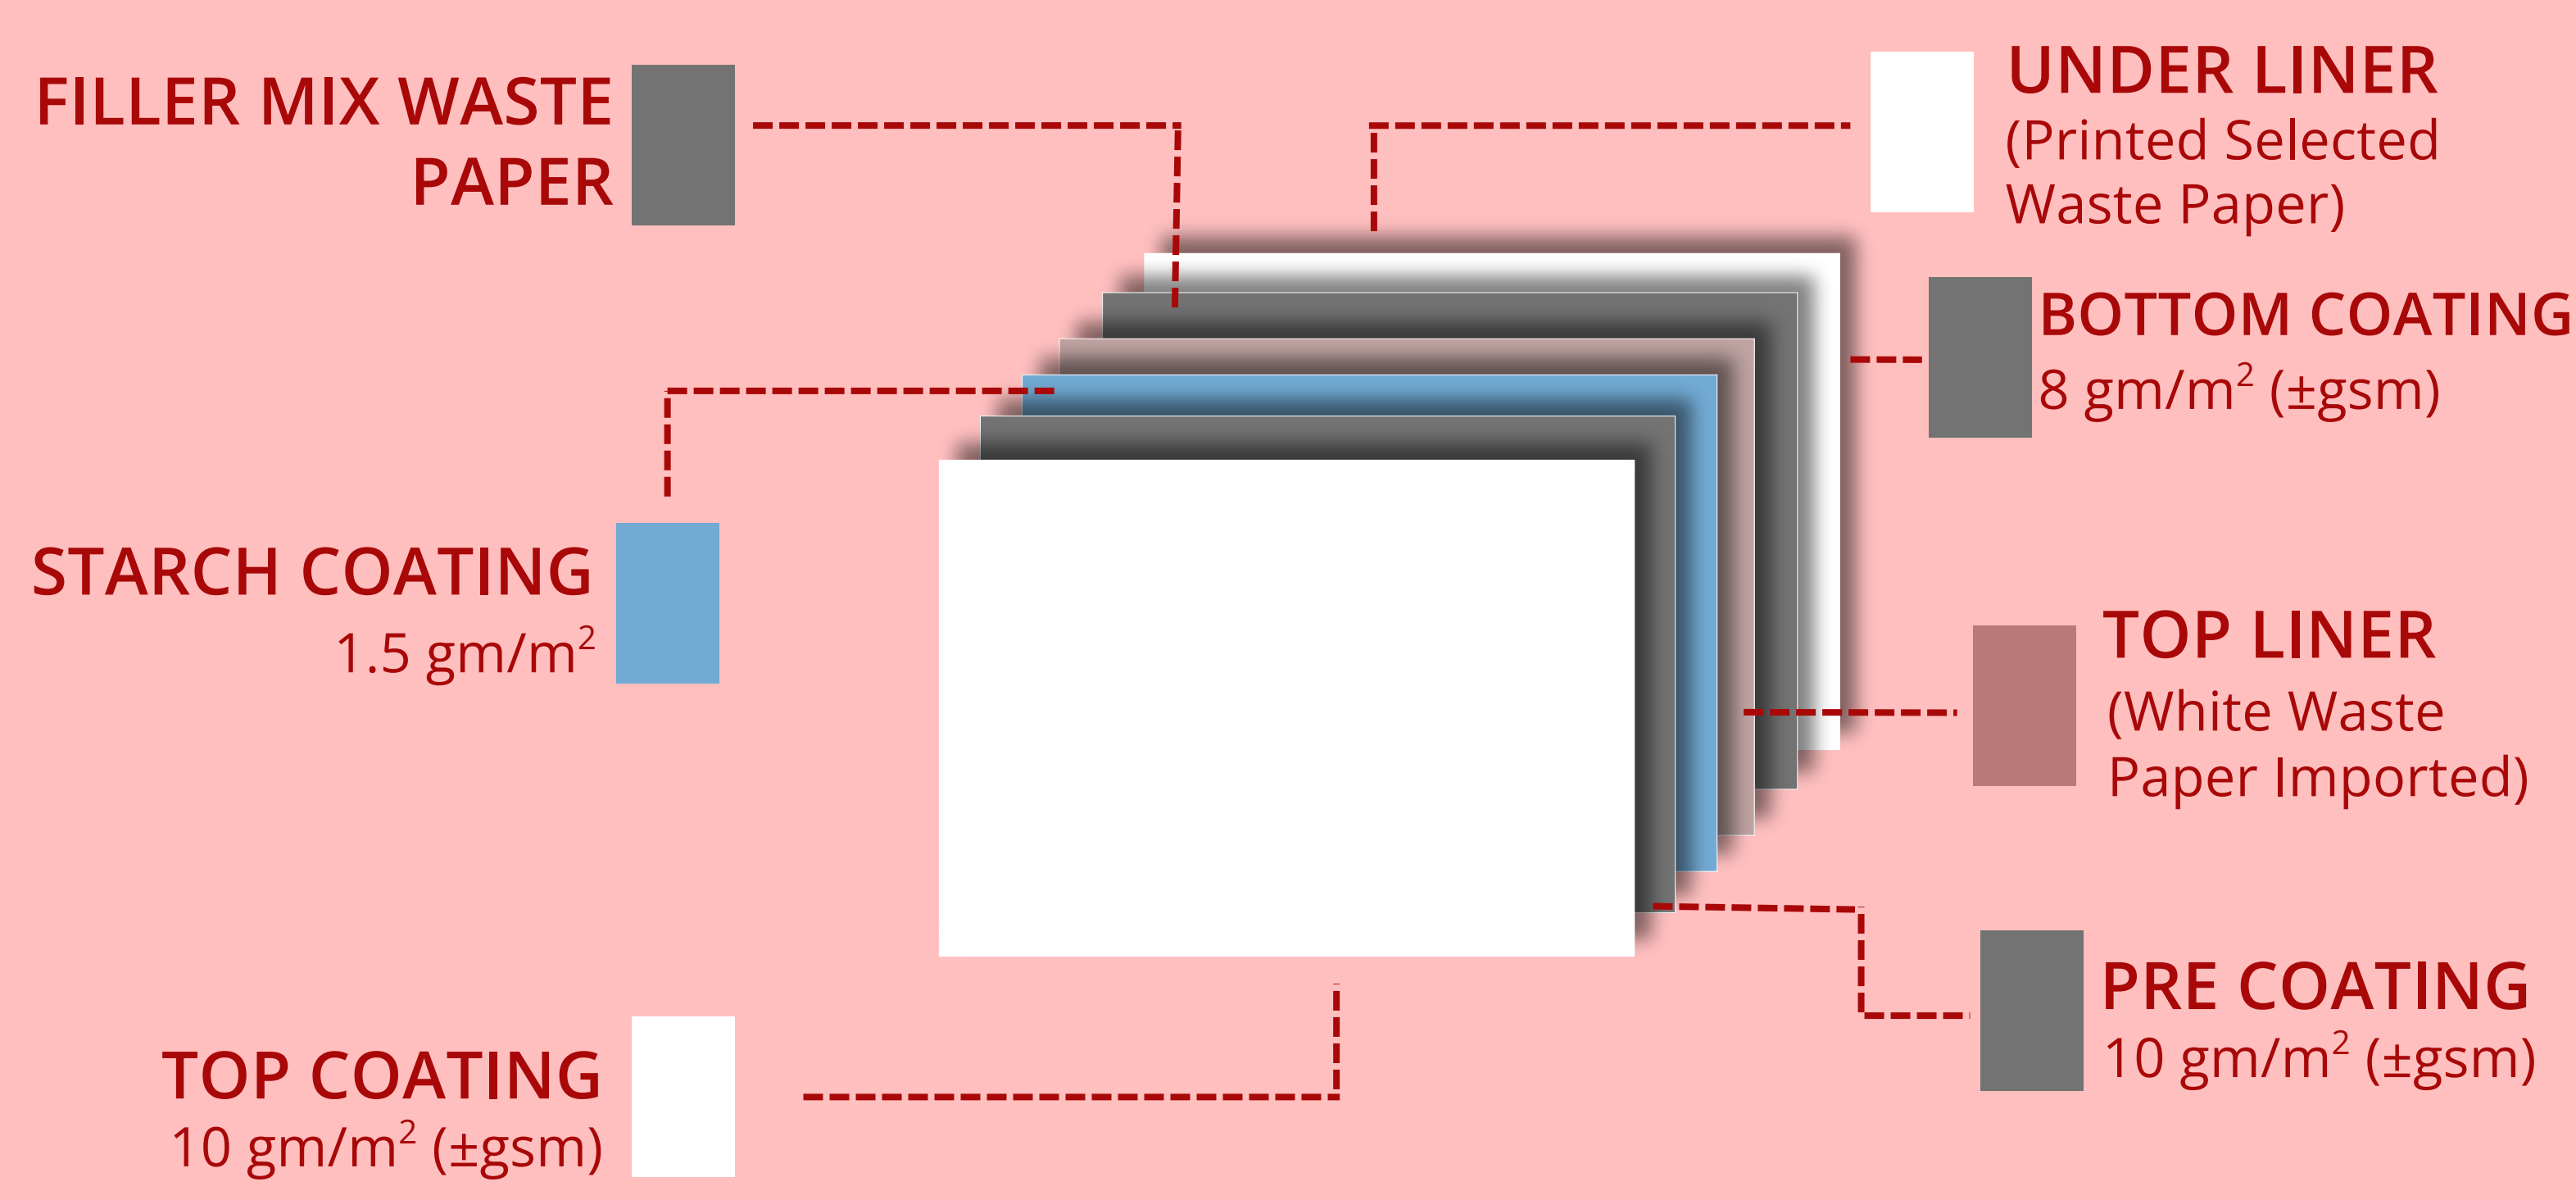

DECKLE

DUPLEX MACHINE:
Min: 315 cm
Max: 326 cm

APPLICATIONS

- 1. Recommend for Multicolour printing on
 - a. OFFSET Printing
 - b. Letter Press
 - c. Roto GRAVURE
- 2. Carton with back side printings
- 3. Adverties pamphlets
- 4. Pharmaceutical cartons
- 5. High Printing job

For more information, please contact your Dev Priya Products Pvt. Ltd representative or visit our website at www.devproduct.com
This information is subject to modification without notification.